

EasySolar 3 kVA & 5 kVA with Color Control panel

The all-in-one solar power solution



EasySolar 3 kVA

The all-in-one solar power solution

The EasySolar combines a MPPT solar charge controller, an inverter/charger and AC distribution in one enclosure.

The product is easy to install, with a minimum of wiring.

Color Control panel

Two outstanding functions:

- Prioritizes battery charging by the MPPT charge controller
- Connects to the internet, enabling remote monitoring (VRM website) and remote control.

AC distribution

The AC distribution consists of a RCD (30 mA / 63 A) and four AC outputs protected by two 10 A and two 16 A circuit breakers.

An additional 16 A output is controlled by the AC input: it will switch on only when AC is available.

PowerAssist

Unique PowerAssist technology protects the utility or generator supply from being overloaded by adding extra inverter power when needed.


Unique solar application software

Several software programs (Assistants) are available to configure the system for various grid interactive or stand-alone applications. Please see

 $\underline{http://www.victronenergy.nl/support-and-downloads/software/}$



EasySolar 5 kVA

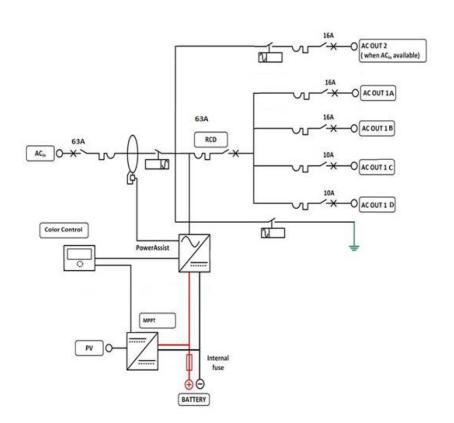





EasySolar	EasySolar 24/3000/70-50 MPPT150/70	EasySolar 48/3000/35-50 MPPT150/70	EasySolar 48/5000/70-: MPPT150/100
	INVERTER/CHARGI		111111111111111111111111111111111111111
Fransfer switch	50A	50A	100A
	INVERTER		
nput voltage range	19 – 33 V	19 – 33V	38 – 66V
Heavy duty' output AC 2		16 A	
Output AC 1a, 1b, 1c, 1d	Output voltage: 230 VAC ± 2% Frequency: 50 Hz ± 0,1% (1)		
Cont. output power at 25°C (3)	3000 VA / 2400 W	3000 VA / 2400 W	5000 VA / 4000 W
Cont. output power at 40°C	2200 W	2200 W	3700 W
Cont. output power at 65°C	1700 W	1700 W	3000 W
Peak power	6000 W	6000 W	10000 W
Maximum efficiency	94%	95%	95%
Zero load power	20 W	25 W	35 W
Zero load power in search mode	10 W	12 W	15 W
	CHARGER		
AC Input	Input voltage range: 187-265 VAC Input frequency: 45 – 65 Hz Power factor: 1		
Charge voltage 'absorption'	28,8 V	57,6 V	57,6 V
Charge voltage 'float'	27,6 V	55,2 V	55,2 V
Storage mode	26,4 V	52,8 V	52,8 V
Charge current	70 A	35 A	70 A
Battery temperature sensor		yes	
Programmable relay (5)		yes	
Protection (2)		a - g	
	SOLAR CHARGE CONTR	ROLLER	
Model	MPPT 150/70-MC4	MPPT 150/70-MC4	MPPT 150/100-MC4
Maximum output current (4)	70 A	70 A	100 A
Maximum PV power	2000 W	4000 W	5800 W
Maximum PV open circuit voltage		150 V	
Maximum efficiency	98%		
Self-consumption		10 mA	
Charge voltage 'absorption', default setting	28,8V	57,6 V	57,6 V
Charge voltage 'float', default setting	27,6V	55,2 V	55,2 V
Charge algorithm		multi-stage adaptive	
Temperature compensation	-16 mV / °C	-32 mV / °C	-64 mV / °C
Protection		a - g	
	COMMON CHARACTERIS		
Operating temp. range	-40 to +65°C (fan assisted cooling)		
Humidity (non-condensing):	EVELOCUES	max 95%	
Material & Colour	ENCLOSURE	aluminium (blue BAL sees)	
Material & Colour	aluminium (blue RAL 5012) IP 21		
Protection category Battery-connection	Equr MO	IP 21 8 bolts (2 plus and 2 minus conne	ctions)
•			Three sets of MC4
PV connection	Two sets of MC4	PV connectors.	PV connectors
230 V AC-connection		Screw terminals 13 mm ² (6 AWG)	
Weight	28 kg	28 kg	48 kg
Dimensions (hxwxd)	810 × 258 × 218	810 x 258 x 218	877 × 328 × 241
	STANDARDS		
Safety 	EN 60335-1, EN 60335-2-29, EN 62109-1		
Emission / Immunity	EN 55014-1, EN 55014-2, EN 61000-3-3, EN 61000-6-3, EN 61000-6-2, EN 61000-6-1		
Anti-islanding 1) Can be adjusted to 6oHz and to 24oV 2) Protection: a. Output short circuit b. Overload c. Battery voltage too high d. Battery voltage too low e. Temperature too high f. 23o VAC on inverter output	See our website 3) Non-linear load, crest factor 3:1 4) At 25°C ambient 5) Programmable relay which can be set for general alarm, DC under voltage or genset start signal function		



